ORing TGPS-W9442GF-MM-M12X-QS-MV-IP67

EN50155 10-port managed Gigabit PoE Ethernet switch with 4x10/100/1000Base-T(X) P.S.E. and 4x10/100/1000Base-T(X) with X-coded M12 connector and 2x1000Base-SX, multi-mode, 550m/850nm, Q-ODC connector, IP-67 grade

Features

- > Leading EN50155-compliant Ethernet switch for rolling stock application
- > Support 2 Gigabit fiber ports with embedded Q-ODC interface
- Support O-Ring (recovery time < 30ms over 250 units of connection) and MSTP(RSTP/STP compatible) for Ethernet Redundancy
- > **O-Chain** allow multiple redundant network rings
- Support standard IEC 62439-2 MRP*^{NOTE} (Media Redundancy Protocol) function
- Supports IEEE 802.3at compliant PoE and total power budget is 60 Watts with maximum 30Watts per port
- > Support PoE scheduled configuration and PoE auto-ping check function
- Support IEEE 1588v2 clock synchronization
- > Support IPV6 new internet protocol version
- Support Modbus TCP protocol
- Support IEEE 802.3az Energy-Efficient Ethernet technology
- Provided HTTPS/SSH protocol to enhance network security
- Support SMTP client
- > Support IP-based bandwidth management
- Support application-based QoS management
- > Support Device Binding security function
- Support DOS/DDOS auto prevention
- > IGMP v2/v3 (IGMP snooping support) for filtering multicast traffic
- Support SNMP v1/v2c/v3 & RMON & 802.1Q VLAN Network Management
- Support ACL, TACACS+ and 802.1x User Authentication for security
- Supports 9.6K Bytes Jumbo Frame
- > Multiple notification for warning of unexpected event
- Web-based ,Telnet, Console (CLI), and Windows utility (Open-Vision) configuration
- Support LLDP Protocol
- Wall mounting enabled
- IP-67 housing design



ORine

*NOTE: This function is available by request only.

Introduction

ORing's Transporter[™] series managed Ethernet switches are designed for industrial applications such as rolling stock, vehicle, and railway. The TGPS-W9442GF-MM-M12X-QS-MV-IP67, which is compliant with the EN50155 standard, is a managed Gigabit Redundant Ring Ethernet switch with 4x10/100/1000Base-T(X) P.S.E. and 4x10/100/1000Base-T(X) and 2x1000Base-SX Q-ODC ports which is specifically designed for the toughest and fully compliant with EN50155 requirement. The switch support Ethernet Redundancy protocol, **O-Ring** (recovery time < 30ms over 250 units of connection), O-Chain, MRP*^{NOTE} and MSTP (RSTP/STP compatible) can protect your mission-critical applications from network interruptions or temporary malfunctions with its fast recovery technology. It is specifically designed for the toughest industrial environments. TGPS-W9442GF-MM-M12X-QS-MV-IP67 EN50155 Ethernet switch uses M12 connectors to ensure tight, robust connections, and guarantee reliable operation against environmental disturbances, such as vibration and shock.

TGPS-W9442GF-MM-M12X-QS-MV-IP67 also support Power over Ethernet, a system to transmit electrical power up to **30** watts, along with data, to remote devices over standard twisted-pair cable in an Ethernet network. Each

TGPS-W9442GF-MM-M12X-QS-MV-IP67 switch has 4x10/100/1000Base-T(X) P.S.E. (Power Sourcing Equipment) ports. P.S.E. is a device (switch or hub for instance) that will provide power in a PoE connection. While

TGPS-W9442GF-MM-M12X-QS-MV-IP67 complies with EN50155, the switch supports wide operating temperature from -40 °C to 75 °C. TGPS-W9442GF-MM-M12X-QS-MV-IP67 can also be managed centralized and convenient by Open-Vision, Except the Web-based interface, Telnet and console (CLI) configuration. Therefore, the switch is one of the most reliable choice for highly-managed and Ethernet application.

- **<u>O-Ring</u>**: O-Ring is ORing's proprietary redundant ring technology, with recovery time of less 30 milliseconds and up to 250 nodes. The O-Ring redundant ring technology can protect mission-critical application from network interruptions or temporary malfunction with its fast recover technology.
- <u>O-Chain:</u>O-Chain is the revolutionary network redundancy technology that provides the add-on network redundancy topology for any backbone network, O-Chain allows multiple redundant network rings of different redundancy protocols to join and function together as a larger and more robust compound network topology. O-Chain providing ease-of-use while maximizing fault-recovery swiftness, flexibility, compatibility, and cost-effectiveness in one set of network redundancy topology.
- **MRP***^{NOTE}: Media Redundancy Protocol (MRP) is a data network protocol standardized by the IEC 62439-2. It allows rings of Ethernet switches to overcome any single failure with recovery time much faster than achievable with Spanning Tree Protocol.
- **IP-based Bandwidth Management:** The switch provides advanced IP-based bandwidth management which can limit the maximum bandwidth for each IP device. User can configure IP camera and NVR with more bandwidth and limit other device bandwidth.
- **Application-Based QoS:** The switch also supports application-based QoS. Application-based QoS can set highest priority for data stream according to TCP/UDP port number.
- **Device Binding Function:** ORing special Device Binding function can only permit allowed IP address with MAC address to access the network. Hacker cannot access the IP surveillance network without permission. It can avoid hacker from stealing video privacy data and attacking IP camera, NVR and controllers.
- Advanced DOS/DDOS Auto Prevention: The switch also provided advanced DOS/DDOS auto prevention. If there is any IP flow become big in short time, the switch will lock the source IP address for certain time to prevent the attack. It's hardware-based prevention so it can prevent DOS/DDOS attack immediately and completely.
- **IEEE 1588v2 Technology:** The IEEE 1588v2 technology can fulfill precision time synchronization requirements for protection and control applications.
- Modbus TCP: This is a Modbus variant used for communications over TCP/IP networks.
- **IEEE 802.3az Energy-Efficient Ethernet:** This is a set of enhancements to the twisted-pair and backplane Ethernet family of networking standards that will allow for less power consumption during periods of low data activity. The intention was to reduce power consumption by 50% or more.

*NOTE: This function is available by request only.

Open-Vision

ORing's switches are intelligent switches. Different from other traditional redundant switches, ORing provides a set of Windows utility (Open-Vision) for user to manage and monitor all of industrial Ethernet switches on the industrial network.




Commander

Host Monitor

Topology View

Dimension

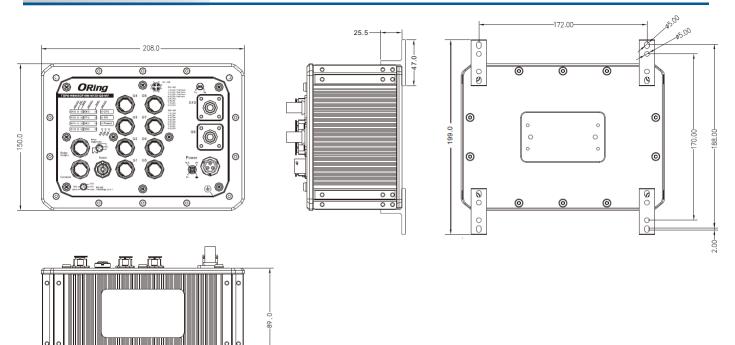

4 5	10/100/1000Base-T(X) M12 port		10/100/1000Base-T(X) P.S.E. M12 port	
6	Pin No.	Description	Pin No.	Description
7	#1	BI_DA+	#1	BI_DA+ with PoE Vout+
1 8	#2	BI_DA-	#2	BI_DA- with PoE Vout+
Coding M12	#3	BI_DB+	#3	BI_DB+ with PoE Vout-
	#4	BI_DB-	#4	BI_DB- with PoE Vout-
-	#5	BI_DD+	#5	BI_DD+
-	#6	BI_DD-	#6	BI_DD-
	#7	BI_DC-	#7	BI_DC-
	#8	BI_DC+	#8	BI_DC+

Pin Definition

Specifications

ORing Switch Model		TGPS-W9442GF-MM-M12X-QS-MV-IP67		
Phy	sical Ports			
10/100/1000Base-T(X) with P.S.E. Ports in M12 Auto MDI/MDIX		4 (8-pin female X-coding)		
10/100/1000Base-T(X) Ports in M12 Auto MDI/MDIX		4 (8-pin female X-coding)		
1000Base-X Fiber Ports in Q-ODC connector		2 x Q-ODC connector (Multi-mode)		
RS-232 Serial Console Port		RS-232 in M12 connector (female A-coding). Baud rate setting: 115200bps, 8, N, 1		
	Fiber Ports Number	2		
	Fiber Ports Standard	1000BASE-SX		
	Fiber Mode	Multi-mode		
	Fiber Diameter (µm)	62.5/125 μm @ 50/125 μm		
Fiber Ports Specification	Fiber Optical Connector	Q-ODC		
	Typical Distance (Km)	0.55 Km		
	Wavelength (nm)	850 nm		
	Max. Output Optical Power (dbm)	-4 dbm		
	Min. Output Optical Power (dbm)	-9.5 dbm		
	Max. Input Optical Power (Saturation)	0 dbm		
	Min. Input Optical Power (Sensitivity)	-18 dbm		
	Link Budget (db)	8.5 db		
Tec	nnology			
Ethernet Standards		IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T		
		IEEE 802.3x for Flow control IEEE 802.3ad for LACP (Link Aggregation Control Protocol) IEEE 802.1p for COS (Class of Service)		

	IEEE 802.1Q for VLAN Tagging		
	IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol)		
	IEEE 802.1s for MSTP (Multiple Spanning Tree Protocol)		
	IEEE 802.1x for Authentication		
	IEEE 802.1AB for LLDP (Link Layer Discovery Protocol)		
	IEEE 802.3at PoE specification (up to 30 Watts per port for P.S.E.)		
	IEEE 802.3af PoE specification (up to 15.4 Watts per port for P.S.E.)		
MAC Table	8k		
Priority Queues	8		
Processing	Store-and-Forward		
	Switching latency: 7 us		
	Switching bandwidth: 20Gbps		
Switch Properties	Max. Number of Available VLANs: 4095		
	IGMP multicast groups: 128 for each VLAN		
	Port rate limiting: User Define		
Jumbo frame	Up to 9.6K Bytes		
	Device Binding security feature		
	Enable/disable ports, MAC based port security		
	Port based network access control (802.1x)		
Security Features	VLAN (802.1Q) to segregate and secure network traffic		
	Radius centralized password management		
	SNMPv3 encrypted authentication and access security		
	Https / SSH enhance network security		
	STP/RSTP/MSTP (IEEE 802.1D/w/s)		
	Redundant Ring (O-Ring) with recovery time less than 30ms over 250 units		
	TOS/Diffserv supported		
	Quality of Service (802.1p) for real-time traffic		
	VLAN (802.1Q) with VLAN tagging and GVRP supported		
	IGMP Snooping		
Software Features	IP-based bandwidth management		
Soleware reactives	Application-based QoS management		
	DOS/DDOS auto prevention		
	Port configuration, status, statistics, monitoring, security		
	DHCP Server/Client/Relay		
	DHCP Server/Client/Relay SMTP Client		
	DHCP Server/Client/Relay SMTP Client Modbus TCP		
	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring		
Network Redundancy	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain		
Network Redundancy	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE		
	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain		
Network Redundancy	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE		
	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE		
LED Indicators	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE MSTP (RSTP/STP compatible)		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.)	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE MSTP (RSTP/STP compatible) Green: Power LED x 1		
LED Indicators Power Indicator (Power)	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP ^{*NOTE} MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring mode		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.) O-Ring Indicator (Ring)	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring mode Green Blinking: Indicates that the Ring is broken.		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.)	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring mode Green Blinking: Indicates that the Ring is broken. Red: Indicate unexpected event occurred		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.) O-Ring Indicator (Ring)	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring mode Green Blinking: Indicates that the Ring is broken. Red: Indicate unexpected event occurred Left Green LED for port Link/Act indicator.		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.) O-Ring Indicator (Ring) Fault Indicator (Fault)	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring mode Green Blinking: Indicates that the Ring is broken. Red: Indicate unexpected event occurred Left Green LED for port Link/Act indicator. Middle Green LED for PoE enable indicator		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.) O-Ring Indicator (Ring) Fault Indicator (Fault) 10/100/1000Base-T(X) M12 P.S.E. Port Indicator	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring mode Green Blinking: Indicates that the Ring is broken. Red: Indicate unexpected event occurred Left Green LED for port Link/Act indicator. Middle Green LED for PoE enable indicator Right Dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.) O-Ring Indicator (Ring) Fault Indicator (Fault) 10/100/1000Base-T(X) M12 P.S.E.	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring mode Green Blinking: Indicates that the Ring is broken. Red: Indicate unexpected event occurred Left Green LED for port Link/Act indicator.		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.) O-Ring Indicator (Ring) Fault Indicator (Fault) 10/100/1000Base-T(X) M12 P.S.E. Port Indicator	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring mode Green Blinking: Indicates that the Ring is broken. Red: Indicate unexpected event occurred Left Green LED for port Link/Act indicator. Middle Green LED for PoE enable indicator Right Dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.) O-Ring Indicator (Ring) Fault Indicator (Fault) 10/100/1000Base-T(X) M12 Port Indicator 10/100/1000Base-T(X) M12 Port	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring mode Green Blinking: Indicates that the Ring is broken. Red: Indicate unexpected event occurred Left Green LED for port Link/Act indicator. Middle Green LED for Pot Einernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Left Green LED for port Link/Act indicator. Right Dual color LED for port Link/Act indicator. Right dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.) O-Ring Indicator (Ring) Fault Indicator (Fault) 10/100/1000Base-T(X) M12 Port Indicator 10/100/1000Base-T(X) M12 Port Indicator 10/00/1000Base-T(X) M12 Port Indicator 1000Base-SX Q-ODC Port Indicator	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring mode Green Blinking: Indicates that the Ring is broken. Red: Indicate unexpected event occurred Left Green LED for port Link/Act indicator. Middle Green LED for PoE enable indicator Right Dual color LED for Ethernet speed indicator. Right Dual color LED for port Link/Act indicator.		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.) O-Ring Indicator (Ring) Fault Indicator (Fault) 10/100/1000Base-T(X) M12 P.S.E. Port Indicator 10/100/1000Base-T(X) M12 Port Indicator 1000Base-SX Q-ODC Port Indicator Power	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring mode Green Blinking: Indicates that the Ring is broken. Red: Indicate unexpected event occurred Left Green LED for port Link/Act indicator. Middle Green LED for Pot Einernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Left Green LED for port Link/Act indicator. Right Dual color LED for port Link/Act indicator. Right dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.) O-Ring Indicator (Ring) Fault Indicator (Fault) 10/100/1000Base-T(X) M12 Port Indicator 10/100/1000Base-T(X) M12 Port Indicator 10/00/1000Base-T(X) M12 Port Indicator 1000Base-SX Q-ODC Port Indicator	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring mode Green Blinking: Indicates that the Ring is broken. Red: Indicate unexpected event occurred Left Green LED for port Link/Act indicator. Middle Green LED for Pot Enable indicator Right Dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Left Green LED for port Link/Act indicator. Right dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.) O-Ring Indicator (Ring) Fault Indicator (Fault) 10/100/1000Base-T(X) M12 P.S.E. Port Indicator 10/100/1000Base-T(X) M12 Port Indicator 1000Base-SX Q-ODC Port Indicator Power	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring mode Green Blinking: Indicates that the Ring is broken. Red: Indicate unexpected event occurred Left Green LED for pot Link/Act indicator. Middle Green LED for PoE enable indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Left Green LED for pot Link/Act indicator. Right Dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Green LED for Link/Act indicator.		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.) O-Ring Indicator (Ring) Fault Indicator (Fault) 10/100/1000Base-T(X) M12 P.S.E. Port Indicator 10/100/1000Base-T(X) M12 Port Indicator 10/100/1000Base-T(X) M12 Port Indicator 1000Base-SX Q-ODC Port Indicator Power Input power	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring mode Green Blinking: Indicates that the Ring is broken. Red: Indicate unexpected event occurred Left Green LED for port Link/Act indicator. Middle Green LED for POE enable indicator Right Dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Left Green LED for port Link/Act indicator. Right dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Green LED for Link/Act indicator. Right dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Green LED for Link/Act indicator. Right dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Green LED for Link/Act indicator 72/110 (50.4-137.5) VDC on 4-pin S-coding, male connector		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.) O-Ring Indicator (Ring) Fault Indicator (Fault) 10/100/1000Base-T(X) M12 P.S.E. Port Indicator 10/100/1000Base-T(X) M12 Port Indicator 1000Base-SX Q-ODC Port Indicator Power Input power Power consumption (Typ.)	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring mode Green Blinking: Indicates that the Ring is broken. Red: Indicate unexpected event occurred Left Green LED for port Link/Act indicator. Middle Green LED for Pot Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Left Green LED for port Link/Act indicator. Right Dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Green LED for Link/Act indicator. Right dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Green LED for Link/Act indicator. Right dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Green LED for Link/Act indicator 72/110 (50.4-137.5) VDC on 4-pin S-coding, male connector 17 Watts		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.) O-Ring Indicator (Ring) Fault Indicator (Fault) 10/100/1000Base-T(X) M12 P.S.E. Port Indicator 10/100/1000Base-T(X) M12 Port Indicator 10/100/1000Base-T(X) M12 Port Indicator 1000Base-SX Q-ODC Port Indicator Power Input power Power consumption (Typ.) Total PoE Output Power	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP**OTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green Indicates that the system operating in O-Ring Master mode Green Blinking: Indicates that the system operating in O-Ring mode Green Blinking: Indicates that the Ring is broken. Red: Indicate unexpected event occurred Left Green LED for port Link/Act indicator. Middle Green LED for Pot Enable indicator Right Dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Left Green LED for port Link/Act indicator. Right dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Green LED for Link/Act indicator. Right dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Green LED for Link/Act indicator 72/110 (50.4-137.5) VDC on 4-pin S-coding, male connector 17 Watts 60 Watts		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.) O-Ring Indicator (Ring) Fault Indicator (Fault) 10/100/1000Base-T(X) M12 P.S.E. Port Indicator 10/100/1000Base-T(X) M12 Port Indicator 10/100/1000Base-T(X) M12 Port Indicator 1000Base-SX Q-ODC Port Indicator Power Input power Power consumption (Typ.) Total PoE Output Power Overload current protection	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP**OTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring mode Green Blinking: Indicates that the Ring is broken. Red: Indicate unexpected event occurred Left Green LED for port Link/Act indicator. Middle Green LED for PoE enable indicator Right Dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Left Green LED for port Link/Act indicator. Right dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Green LED for Link/Act indicator. Right dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Green LED for Link/Act indicator 72/110 (50.4-137.5) VDC on 4-pin S-coding, male connector 17 Watts 60 Watts Present		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.) O-Ring Indicator (Ring) Fault Indicator (Fault) 10/100/1000Base-T(X) M12 P.S.E. Port Indicator 10/100/1000Base-T(X) M12 Port Indicator 10/100/1000Base-T(X) M12 Port Indicator 1000Base-SX Q-ODC Port Indicator Power Input power Power consumption (Typ.) Total PoE Output Power Overload current protection Reverse Polarity Protection	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP**OTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring mode Green Blinking: Indicates that the Ring is broken. Red: Indicate unexpected event occurred Left Green LED for port Link/Act indicator. Middle Green LED for PoE enable indicator Right Dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Left Green LED for port Link/Act indicator. Right dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Green LED for Link/Act indicator. Right dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Green LED for Link/Act indicator 72/110 (50.4-137.5) VDC on 4-pin S-coding, male connector 17 Watts 60 Watts Present		
LED Indicators Power Indicator (Power) Ring Master Indicator (R.M.) O-Ring Indicator (Ring) Fault Indicator (Fault) 10/100/1000Base-T(X) M12 P.S.E. Port Indicator 10/100/1000Base-T(X) M12 Port Indicator 10/100/1000Base-T(X) M12 Port Indicator 1000Base-SX Q-ODC Port Indicator Power Input power Power consumption (Typ.) Total PoE Output Power Overload current protection Reverse Polarity Protection Physical Characteristic	DHCP Server/Client/Relay SMTP Client Modbus TCP O-Ring O-Chain MRP*NOTE MSTP (RSTP/STP compatible) Green: Power LED x 1 Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system operating in O-Ring Master mode Green Blinking: Indicates that the Ring is broken. Red: Indicate unexpected event occurred Left Green LED for port Link/Act indicator. Middle Green LED for Pot Ethernet speed indicator Right Dual color LED for Pthernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Green LED for Link/Act indicator. Right dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Green LED for Link/Act indicator. Right dual color LED for Ethernet speed indicator: Green LED for 1000Mbps, Amber for 100Mbps, Off for 10Mbps Green LED for Link/Act indicator. 72/110 (50.4-137.5) VDC on 4-pin S-coding, male connector 17 Watts 60 Watts Present Present		

*NOTE: This function is available by request only.

Weight (g)	3300 g		
Environmental			
Storage Temperature	-40 to 85°C (-40 to 185°F)		
Operating Temperature	-40 to 75°C (-40 to 167°F)		
Operating Humidity	5% to 95% Non-condensing		
Regulatory Approvals			
EMC	C E EMC (EN 55024, EN 55032), FCC Part 15 B		
EMI	EN 55032, CISPR32, EN 61000-3-2, EN 61000-3-3, FCC Part 15 B class A		
EMS	EN 55024 (IEC/EN 61000-4-2 (ESD), IEC/EN 61000-4-3 (RS), IEC/EN 61000-4-4 (EFT), IEC/EN 61000-4-5 (Surge), IEC/EN 61000-4-6 (CS), IEC/EN 61000-4-8(PFMF), IEC/EN 61000-4-11 (DIP))		
Shock	hock IEC60068-2-27		
Free Fall IEC60068-2-31			
Vibration	bration IEC60068-2-6		
Safety	EN60950-1		
MTBF	258,060 hours		
Warranty	5 years		

Ordering Information

TGPS-W9ABCDD-MM-M12X-QS-MV-IP67							
Code Definition	10/100/1000Base-T(X) P.S.E. Port Number	10/100/1000Base-T(X) Port Number	Additional Port Number	Additional Port Type			
Option	- 4: 4 ports	- 4: 4 ports	- 2: 2 ports	-GF: 1000Base-X Fiber Ports			
	Model Name	Description					
Available Model	TGPS-W9442GF-MM-M12X-Q S-MV-IP67	EN50155 10-port managed Gigabit PoE Ethernet switch with 4x10/100/1000Base-T(X)					
		P.S.E. and 4x10/100/1000Base-T(X) with X-coded M12 connector and 2x1000Base-SX,					
		multi-mode, 550m/850nm, Q-ODC connector, 110VDC Power Input, IP-67 grade					

Packing List

- TGPS-W9442GF-MM-M12X-QS-MV-IP67 x 1
- ORing Tool CD x 1

•

•

Quick Installation Guide x 1

Optional Accessories

Open-Vision M500: Powerful Network Management Windows Utility Suit, 500 IP devices