

Industrial Panel Computer T0212K



21.5" TFT LCD Capactive/Resistive Touch, Intel®Skylake-U/Kabylake-U CPU,2*LAN, 4*USB3.0, 1* Line out, 1*PCI/PCIe X1, DC 9~36V, IP 65 Front panel.



Key Features

Aluminum die-casting chassis, fanless design 21.5" LED TFT LCD, capacitive/resistive touch Intel® Skylake-U/Kabylake-U CPU 1*DDR4 2133 SODIMM, Max 16GB 1*Mini PCIe (PCIe+USB), Opt.1*32-bit PCI/PCIe X1 4*COM, 2*LAN, 4*USB3.0, 1*USB2.0, 1*Line out 2.5" HDD Bay, 1*mSATA ATX button & remote button DC 9-36V power input

T0212K is an intelligent, fanless embedded panel, the system powered by Intel® Skylake-U/Kabylake-U Celeron and Core I3/I5/I7 CPU. Supports 21.5inch 1920*1080@60Hz TFT LCD. It offers multiple I/O interface, 1*2.5" easy-pluggable SATA bay and 1*mSATA

A for storage, 1 MiniPCIe socket (PCIex1+USB signal) and PCI/PCIe X1 for expansion. DC 9-36V wide power input, be fit for use in MES and machines HMI.


System	CPU	Gen. 6th Intel® Skylake-U Celeron 3855U; Core I3-6100U; I5-6200U; I7-6500U CPU Gen. 7th Intel® Kabylake-U Celeron 3865U; Core I3-7100U; I5-7200U; I7-7500U CPU
	Chipset	Intel®SOC
	System Memory	1*DDR4 2133 MHz SODIMM, Max 16GB
	Storage	1*2.5" SATA HDD bay, support SATA3.0 6Gbps HDD/SSD, 1*mSATA
	Display	21.5" LED backlight TFT LCD and HDWI (4K resolution), dual display, Intel HD graphics 510/520
	Touch	5 wire resistive touch optional projected capacitive touch, USB control
	Expansion	1*Mini PCIe(PCIe&USB signal), Opt.1*32-bit PCI or 1*PCIeX1
	Audio	Realtek ALC662VD controller, Support 5.1 channel, 2*3W Speaker
	Real I/O	4*COM:2*RS232, 2*RS232/422/485, DB9 (when using PCI/PCIe, there are only 2*COM) 1*HDMI, 1*Line out 4*USB3.0 Type A 2*RJ45
	Front I/O	1*USB2.0 Type A
	LAN	2*Intel I210AT PCIe Gig. Ethernet, 10/100/1000Mbps
	Control SW/LED	1*Cmos, 1*AT/ATX, Power button, 2-pin connector with power switch signal, HDD LED
	Power Supply	DC to DC: 9~36V input, consumption: TDP 12W/4.12A (Intel® I5-6200U CPU, 4GB DDR4)
	OS	Windows 7, Windows 8.1, Windows 10, Linux
Mechanical & Environment	Construction	Aluminum die-casting front bezel, fin-shaped radiator shell
	Operating Temperature	0-50°C -HDD(-10-55°C -SSD), with airflow
	Storage Temperature	-20-60°C
	Storage Humidity	10-95%, non-condensing
	Shock	10g peak acceleration(duration 1ms), in operating with HDD
	Vibration	1g 5~500Hz, in operating with HDD
	Mounting	Panel mounting, VESA 100*100 and 75*75mm
	Dimension	(W*H*D):546.9*344.7*64.1mm; mounting cut out(W*H): 537.5*335.3mm
	Net Weight	8.15kg
	EMC	CE, FCC Class A

LCD	Type	21.5" TFT LED
	Resolution	1920*1080
	Color	16.7M
	Pixel Pitch(mm)	0.248*0.248
	Brightness(cd/m2)	300
	Viewing Angle	89 Degree (left) , 89 Degree (right) , 89 Degree (up) , 89 Degree (down) ,
	Operating Temperature	0-50°C
Touch	Backlight Lifetime	50000 hours
	Type	Project capacitive touch
	Resolution	gapless
	Light Transmittance	90%
	Interface	USB
	Consumption	
	OS	+5V @ 300mA Windows/Linux 3 billion times
Click Lifetime		

Dimension



Unit : mm

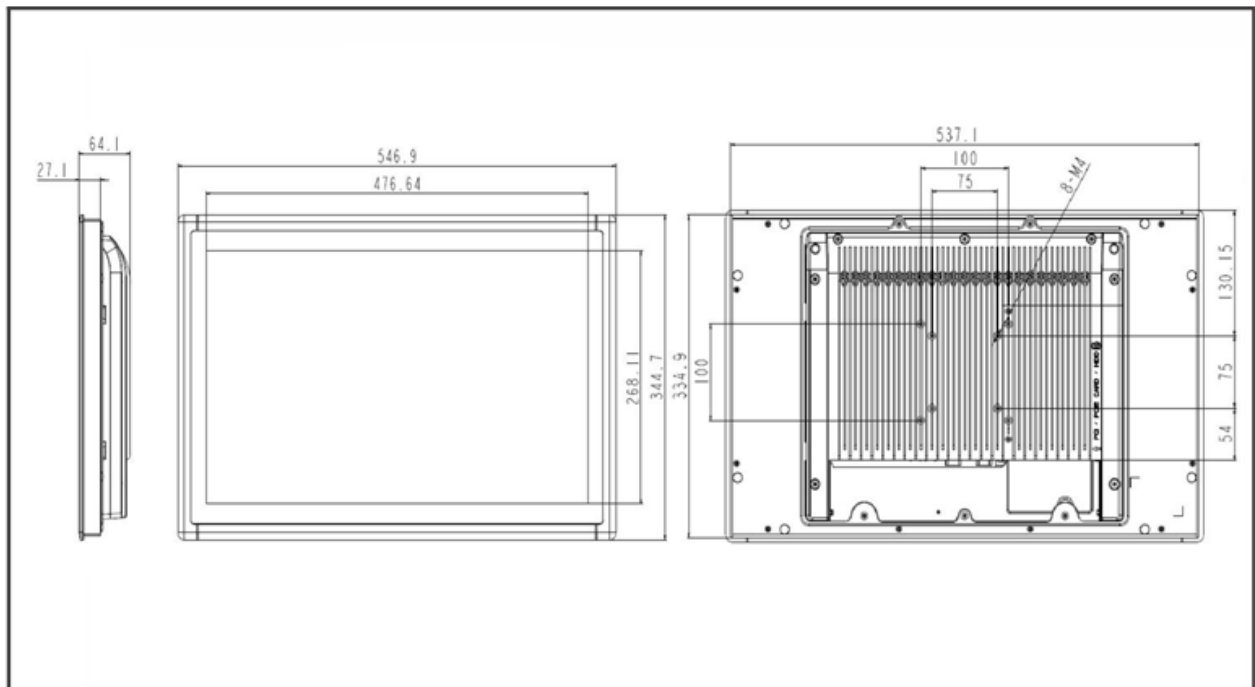

* All specifications and photos are subject to change without notice

www.gronet.ru