

AR-N8601FL

MicroBox with VIA Eden ULV 500MHz, 3 x 10/100Mbps LAN, CF, Serial Port, USB2.0

Networking Platform



Features

- VIA Eden ULV 500MHz
- 3 x 10/100 LAN
- CF, USB2.0
- Support Console Function
- Fanless Design
- Power effective



Fanless

VIA Eden


DDR2

CF


Specification

System	
CPU	VIA Eden ULV 500MHz
Chipset	VIA CN700 + 8237R plus
Memory	1 x 200-pin SO-DIMM socket support 400/533MHz DDR2 SDRAM up to 1GB, 512MB pre-installed
BIOS	Award
OS Support	Windows XP, Linux 2.6.11 and 2.6.18, Fedora 5/6/7/8
Video	
Video Interface	VGA (Onboard pin header)
Ethernet	
Chipset	Realtek RTL8100C (10/100Mbps) x 3
Connector	RJ45
LAN	3 x 10/100Mbps LAN
PXE	Yes
Bypass LAN	N/A
Auto-MDIX	N/A
Storage	
SATA	1 x SATA port
CF	1 x Compact Flash socket
HDD Bay	N/A
I/O	
Serial Port	1 x RS-232 (1 x DB9)
USB Port	2 x USB2.0 (2 x external port)

Power Requirement	
Power Supply	DC 12V Input Power Supply
Power Consumption	3.6W
Mechanical & Environment	
Dimension	210mm x 150mm x 33mm
Operating Temp.	0~40°C (32~104°F)
Storage Temp.	-20~80°C (-4~176°F)
Relative Humidity	0 to 90% @ 40°C, non-condensing
Safety	CE, FCC
Standard	
AR-N8601FL	MicroBox with VIA Eden ULV 500MHz, 512MB DDR2, 3 x 10/100Mbps LAN, CF, Serial Port, USB2.0

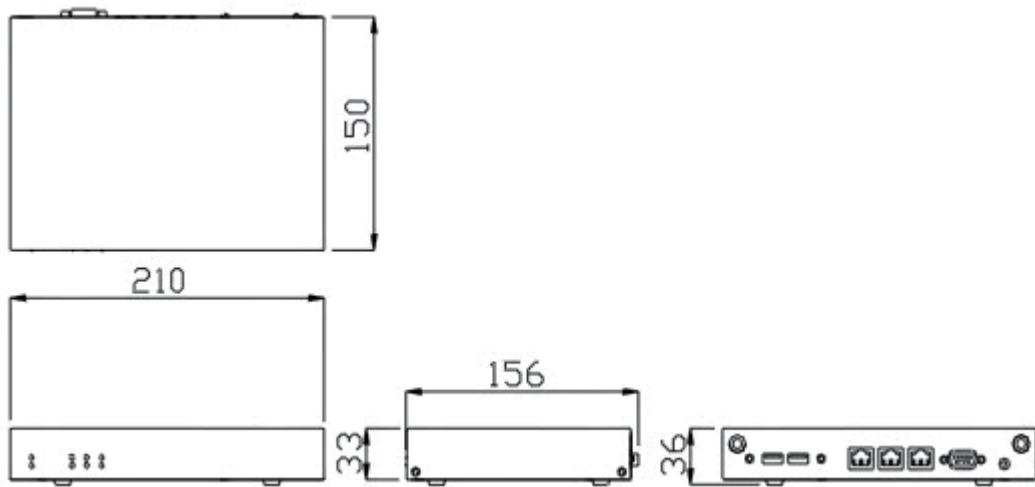

 I/O Connectors

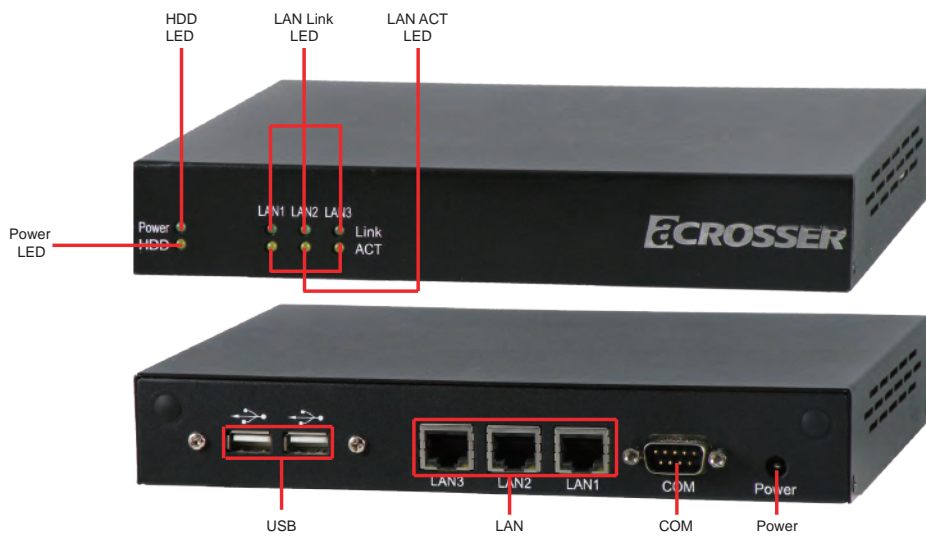

Packing List

- 1. AR-N8601 x 1
- 2. Driver CD x 1
- 3. Quick user manual x 1
- 4. Console cable x 1
- 5. Power cord (Optional for USA or EU type) x 1
- 6. Power adaptor x 1