

KMDA-2701


Intel Celeron J1900 CPU, 4*LAN, 7*USB, 6*COM, HDMI and VGA, DC-IN 9~36V, CPU Temp. show in LED, Audio Line out & Mic, 24 bit DIO.

Key Features

- Universal Aluminum Chassis, Fanless Design
- Intel Baytrail Celeron J1900 2.0~2.42G CPU
- 1*DDR3L 1333MHz SODIMM , Up to 8GB
- 4*Intel I211-AT PCIe Gig LAN
- 1*HDMI and 1*VGA, Audio Line out and Mic
- 1*USB3.0, 6*USB2.0, 6*COM, 24 bit DIO
- 1*Mini PCIe(PCie+ USB),1*Mini PCIe(SATA+ USB)
- 1*3.5" SATA2 Bay and 1*mSATA
- DC 9~36V Wide Power Input



Universal dimension box computer KMDA-2701, PCB to PCB mult structure and fanless design. Powered by Intel Celeron J1900 2.0-2.42GHz 4cores 4threads processor, DDR3L 1333MHZ SODIMM memory up to 8GB. 4 Gig. LAN, 1*USB3.0, 6*USB2.0(1 inside) , HDMI and VGA dual display, 24bit DIO, 1*Mini PCIe, 1*mSATA and 1*3.5" SATA bay. DC 9~36V wide power input, Operating temperature showing in LED, economic and reliable, it will be fit for security and manufacture application.

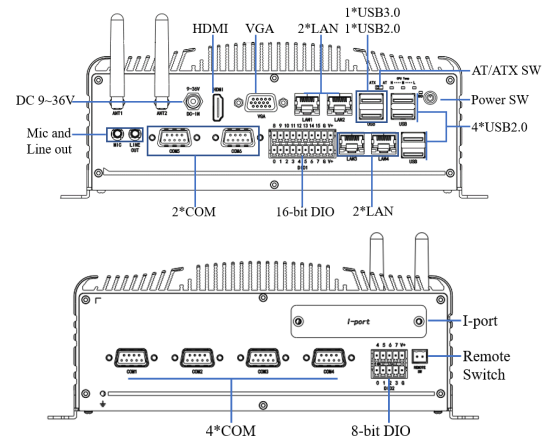


SPEC.

System	CPU	Intel Baytrail-D Celeron J1900 , 2.0~2.42GHz, 4cores, 4threads, 2M cache, 22nm, TDP 10W
	System Memory	1*DDR3L 1333MHz SODIMM, Up to 8GB
	Expansion	1*Full size Mini PCIe with PCIe X1(4LAN Non PCIe) and USB with SIM slot, support 4G LTE /Wifi/BT etc. ; 1*Full size Mini PCIe with USB+ SATA3 signal use to be mSATA
	Graphics	Intel HD Graphics, VGA resolution 1920*1200@60Hz, HDMI resolution1920*1080@60Hz, Dual independent display , Support OpenGL 3.2, DirectX 11, OpenCL 1.2, MPGE2/H.264 Realtek ALC662
	Audio	HD Audio , 5.1 sound channel, Inside 3W left/right amplify speaker header
	LAN	4*Intel I211AT PCIe Gigabit Ethernet, Integrated 10/100/1000M transceiver
	KB & MS	USB keyboard and mouse
	Storage	1*3.5" HDD bay, SATA2 3.0Gbps, cooling by aluminum cover; 1*mSATA full size, dual AHCI
	DIO	24 bit TTL signal, Programmable input and output
	I-port	Optional 1*USB2.0 or Mini PCIe module I/O ports (such as CAN Bus, Gig LAN etc.)
	I/O Ports	4*RJ45 LAN with LED (Front); 1*USB3.0 Type A and 5*USB2.0 Type A(Front) , 1*USB2.0 Type A (Inside) 2*10Pin 16bit DIO terminal connector (Front); 2*5Pin 8bit DIO terminal connector(Rear) 4*RS232/422/485 and 2*RS232 Db9 connector(Rear) 1*HDMI and 1*VGA(Front); 1*Line-out and 1*Mic, dual 3.5mm phone jack(Front) 1*2pin terminal connector, with power sw signal (Rear)
	LED	1*Power on LED, 1*HDD Run LED, 3*CPU temp. LED(Red: Warning, Yellow: High, Green: Normal)
	Control SW	1*Power sw(Front), 1*2pin term. power sw (Rear), 1*AT/ATX Select dip(Front)
	Power Supply	DC 9~36V Input, D-Jack with M8 screw (Front) ; Consumption: 12V/1.6A(3.5" HDD)
	Watchdog Timer	Watchdog timeout programmable via software 1 to 255 second
OS Support	Windows 7, Windows 8.1, Windows 10, Linux Fedora Ubuntu	

Mechanical	Structure	U form Aluminum Chassis, SGCC
	Color	frame Silvery
	Mounting	Desktop mounting
	Dimension	(W*H*D) : 210*144*82.7mm
	Net Weight	2.60kg
Environmental	Operating temperature	-20°C~70°C – Fanless with wide operating temp. SSD, Airflow -10°C~55°C – Fanless with HDD, Airflow
	Storage temperature	-40°C~85°C
	Storage humidity	10~90%@40°C, Non-condensing
	Vibration	5 grms/5~500Hz/random/in working(SSD); 1 grms/5~500Hz/random/in working(HDD)
	Shock	50g peak acceleration(11ms duration)(SSD); 20g peak acceleration(11ms duration)(HDD)
	EMC	CE/FCC Class A

Dimension

Unit: mm

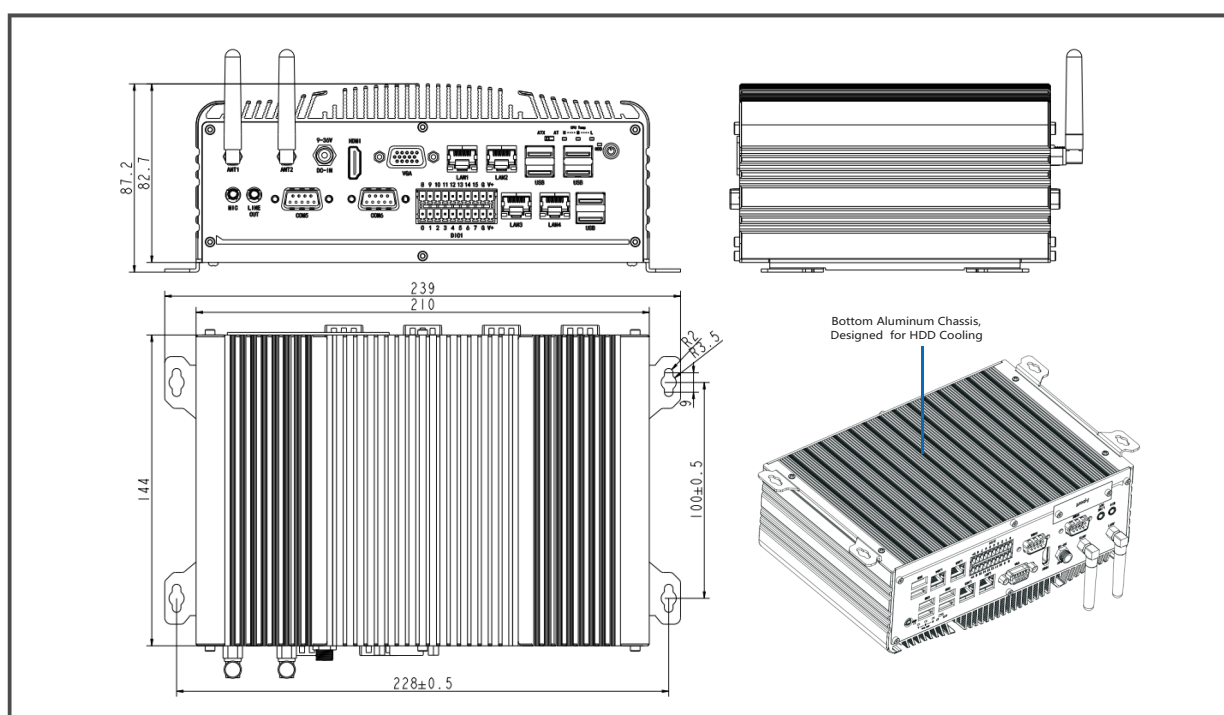

Ordering Info.

Model NO.	Introduction
KMDA-2701/S001	Fanless Embedded Box Computer, Intel® J1900 CPU, 2*LAN, 1*USB3.0, 6*USB2.0,6*COM, 8bit DIO, 1*HDMI, 1*VGA, Audio out/Mic, 2*Mini PCIe(One of them share slot with mSATA) , 1*I-port, 1*3.5" HDD bay, DC 9~36V
KMDA-2701/S002	Fanless Embedded Box Computer, Intel® J1900 CPU, 4*LAN, 1*USB3.0, 6*USB2.0,6*COM, 24bit DIO, 1*HDMI, 1*VGA, Audio out and Mic, 1*Mini PCIe(Share slot with mSATA) , 1*I-port, 1*3.5" HDD bay, DC 9~36V
KMDA-2701/T001	Fanless Embedded Box Computer, Intel® J1900 CPU, 2*LAN, 1*USB3.0, 4*USB2.0,4*COM, 8bit DIO, 1*HDMI, 1*VGA, Audio out, 2*Mini PCIe(One of them share slot with mSATA) , 1*I-port, 1*3.5" HDD bay, DC 9~36V
PA-60DC12	AC/DC power adapter, DC 12V/5A 60W

*All specifications and photos are subject to change without notice.

www.jhctech.com © 2020 Jhctech.Co., Ltd.All rights reserved.

Updated Jul, 9th, 2020