

Nuvo-9000 Series

Intel® 12th-Gen Core™ Rugged Embedded Computer with 6x GbE, USB 3.2 Type-C, Patented Cassette & MezIO™ Interface



CE FC

Key Features

- Supports Intel® 12th-Gen Alder Lake Core™ 16C/ 24T 35W/ 65W CPU
- Patented Cassette for PCI/PCIe add-on card accommodation
- Rugged, -25°C to 70°C fanless operation
- Up to 6x GigE ports with optional PoE+, supporting 9.5 KB jumbo frame
- 1x USB 3.2 Gen2x2 type-C and 6x USB 3.2 Gen2x1 type-A ports
- Supports M.2 Gen4x4 NVMe and 2x SATA ports
- MezIO™ interface for easy function expansion
- VGA/ DVI/ DP triple independent display, supporting 4K2K resolution

Contact Neosys

Get Quote

*R.O.C Patent No. M456527

Introduction

Nuvo-9000 series is Neosys' new rugged embedded computer based on Intel® 12th-Gen Alder Lake platform. Benefiting from cutting-edge Intel 7 photolithography, the latest Core™ desktop processor comes with up to 16 cores and 24 threads and presents an incredible boost of computational performance. Combining the increase of DDR5 memory bandwidth and PCIe Gen4 NVMe high-speed disk read/write, users can expect an overall system performance improvement of up to 1.8x when compared to previous 10th or 11th-Gen platforms.

Nuvo-9000 series inherits Neosys' patented expansion Cassette design to provide great versatility by allowing additional installation of PCIe or PCI add-on cards. There are three expansion Cassette options available for Nuvo-9000 series, the Nuvo-9000E features a single x16 Gen3 PCIe slot; Nuvo-9000DE has dual x16 PCIe slots, and Nuvo-9000P has a single PCI slot. For users who need more flexible storage, Nuvo-9000LP has a 2.5" HDD tray instead of an expansion Cassette to support a hot-swappable 2.5" HDD/SSD.

I/O functions are also comprehensively enhanced. In addition to six gigabit Ethernet ports with PoE+ PSE option, Nuvo-9000 series features a USB 3.2 Gen2x2 type-C port offering 20 Gbps bandwidth for data exchange with external devices, plus another six USB 3.2 Gen2x1 type-A ports for USB3 camera connectivity. It also has an upgraded M.2 Gen4x4 slot to support the latest NVMe SSD to boost disk read/write speed up to 7000 MB/s. For unfulfilled I/O requirements, users can utilize the expansion Cassette to add on function-specific PCIe/ PCI card, the proprietary MezIO interface, and internal mini-PCIe/M.2 interfaces.


With its field-proven thermal design, significant CPU and I/O upgrades, and multiple expansion methods, the Neosys Nuvo-9000 series fits your need for ruggedness, performance, and versatility for a variety of applications.

Specifications


System Core		Expansion Bus		
Processor	Supporting Intel® 12th-Gen Alder Lake Core™ CPU (LGA1700 socket, 35W/ 65W TDP)	PCI/PCI Express	1x PCIe x16 slot@Gen3, 16-lanes PCIe signals in Cassette (Nuvo-9002E/ 9006E)	
	- Intel® Core™ i9-12900E/ i9-12900TE		2x PCIe x16 slots@Gen3, 8-lanes PCIe signals in Cassette (Nuvo-9002DE/ 9006DE)	
	- Intel® Core™ i7-12700E/ i7-12700TE		1x PCI slot in Cassette (Nuvo-9002P/ 9006P)	
	- Intel® Core™ i5-12500E/ i5-12500TE	Mini PCI Express	1x full-size mini PCI Express socket	
	- Intel® Core™ i3-12100E/ i3-12100TE		M.2	1x M.2 2242/3052 B key socket with SIM slot for M.2 5G/ 4G module
	- Intel® Pentium® G7400E/ G7400TE			1x M.2 2242/3052 B key socket with SIM slot for M.2 5G/ 4G module
- Intel® Celeron® G6900E/ G6900TE	Expandable I/O	1x MeziO™ expansion port for Neosys MeziO™ modules		
Chipset	Intel® 600 Series PCH platform controller hub	Power Supply		
Graphics	Integrated Intel® UHD Graphics 770 (32EU)	DC Input		
Memory	Up to 64 GB DDR5 4800 SDRAM (two SODIMM slots)	1x 3-pin pluggable terminal block for 8 to 48V DC input		
AMT	Supports Intel vPro/ AMT 16.0	Remote Ctrl. & LED Output		
TPM	Supports dTPM 2.0	1x 3-pin pluggable terminal block for remote control and PWR LED output		
I/O Interface		Mechanical		
Ethernet port	2x Gigabit Ethernet ports by I219 and I210 (Nuvo-9002E/ P/ DE) with screw-lock	Dimension	240 mm (W) x 225 mm (D) x 90 mm (H) (Nuvo-9000E/ P series)	
	6x Gigabit Ethernet ports by I219 and 5x I210 (Nuvo-9006E/ P/ DE) with screw-lock		240 mm (W) x 225 mm (D) x 110.5 mm (H) (Nuvo-9000DE series)	
PoE+	Optional IEEE 802.3at PoE+ PSE for Port 3 ~ Port 6 100 W total power budget	Weight	4.4 kg (Nuvo-9000E/ P series) TBD (Nuvo-9000DE series)	
USB 3.2	1x USB 3.2 Gen2x2 (20 Gbps) port in type-C connector with screw-lock	Mounting	Wall-mount (standard) or DIN-rail mount (optional)	
	6x USB 3.2 Gen2x1 (10 Gbps) ports in type-A connectors		Environmental	
USB 2.0	2x USB 2.0 ports	Operating Temperature	with 35W CPU -25°C ~ 70°C **	
Video Port (Integrated Graphics)	1x VGA, supporting 1920 x 1200 resolution		with 65W CPU -25°C ~ 70°C */** (configured as 35W TDP)	
	1x DVI-D, supporting 1920 x 1200 resolution		-25°C ~ 50°C */** (configured as 65W TDP)	
Serial Port	1x DisplayPort, supporting 4096 x 2304 resolution	Storage Temperature	-40°C ~ 85°C	
	2x software-programmable RS-232/ 422/ 485 ports (COM1/ COM2)		Humidity	10%~90% , non-condensing
2x RS-232 ports (COM3/ COM4)	Vibration	Operating, MIL-STD-810G, Method 514.6, Category 4		
Audio	1x 3.5 mm jack for mic-in and speaker-out	Shock	Operating, MIL-STD-810G, Method 516.6, Procedure I, Table 516.6-II	
Storage Interface		EMC	CE/FCC Class A, according to EN 55032 & EN 55024	
SATA HDD	2x internal SATA port for 2.5" HDD/ SSD installation, supporting RAID 0/ 1	* For sub-zero and over 60°C operating temperature, a wide temperature HDD/ SSD/ NVMe is required.		
M.2 NVMe	1x M.2 2280 M key NVMe socket (PCIe Gen4x4) for NVMe SSD			

* For sub-zero and over 60°C operating temperature, a wide temperature HDD/ SSD/ NVMe is required.

Appearance

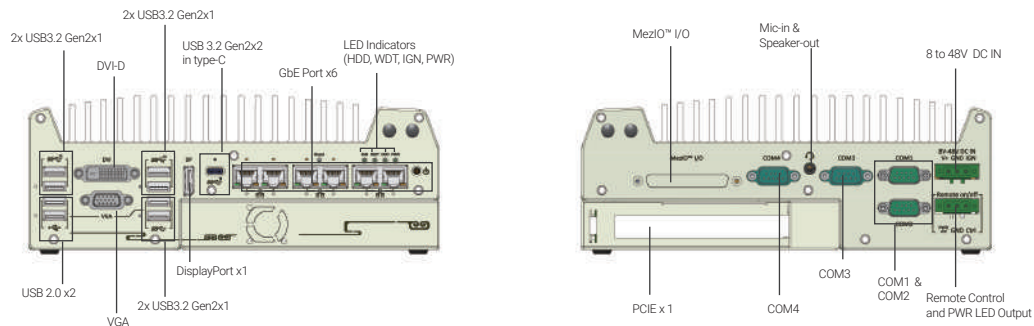

Dimensions

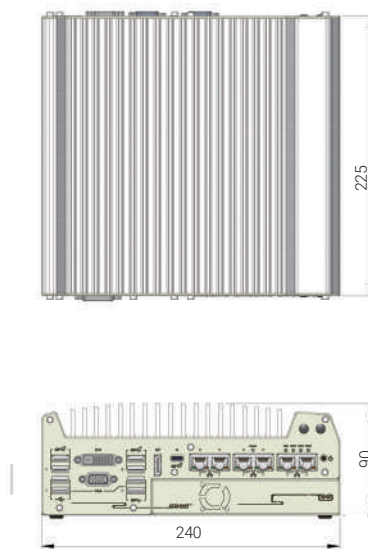

Unit : mm

Ordering Information

Model No.	Product Description
Nuvo-9002E	Intel® 12th-Gen Core™ Rugged Embedded Computer with 2x GbE, USB 3.2 Type-C, single-slot PCIe Cassette & MeziO™ Interface
Nuvo-9002DE	Intel® 12th-Gen Core™ Rugged Embedded Computer with 2x GbE, USB 3.2 Type-C, dual-slot PCIe Cassette & MeziO™ Interface
Nuvo-9002P	Intel® 12th-Gen Core™ Rugged Embedded Computer with 2x GbE, USB 3.2 Type-C, single-slot PCI Cassette & MeziO™ Interface
Nuvo-9006E	Intel® 12th-Gen Core™ Rugged Embedded Computer with 6x GbE, USB 3.2 Type-C, single-slot PCIe Cassette & MeziO™ Interface
Nuvo-9006DE	Intel® 12th-Gen Core™ Rugged Embedded Computer with 6x GbE, USB 3.2 Type-C, dual-slot PCIe Cassette & MeziO™ Interface
Nuvo-9006P	Intel® 12th-Gen Core™ Rugged Embedded Computer with 6x GbE, USB 3.2 Type-C, single-slot PCI Cassette & MeziO™ Interface
Nuvo-9002LP	Intel® 12th-Gen Core™ Rugged Embedded Computer with 2x GbE, USB 3.2 Type-C, MeziO™ Interface & 2.5" HDD tray
Nuvo-9006LP	Intel® 12th-Gen Core™ Rugged Embedded Computer with 6x GbE, USB 3.2 Type-C, MeziO™ Interface & 2.5" HDD tray
PoE+ Option	Option of 802.3at PoE+ PSE for GbE port 3 ~ port 6

Optional Accessories

DINRAIL-O	DIN-rail mount assembly for Nuvo-9000 series
Dmpbr-Nuvo5000_7000	Neosys' patented damping brackets assembly for Nuvo-9000 Series
PA-160W-OW	160W AC/DC power adapter 20V/8A;18AWGx4C/120cm, cord end terminals for terminal block, operating temperature : -30°C to 70°C.