


AMB-IH61T3

Intel® H61 Chipset with Core i7/ i5/ i3 Mini-ITX Motherboard,
2 x VGA, 2 x GbE, 10 x COM, 8 x USB, 1 x PCI-E x16, 1 x Mini PCIe



Features

- Intel LGA1155 Socket supports Intel Pentium/ 2nd Core i3/ 3rd Generation Core i3/5/7 CPU
- With Cooler Module (W90 x L90 x H50 mm)
- Two DIMM slots support DDR3 1333/ 1066 SDRAM up to 16GB
- 2 x VGA, 2 x GbE, 10 x COM, 8 x USB2.0, 1 x PCI-E x16, 1 x Mini PCIe



Specification

Specification

CPU	Intel LGA1155 Socket support up to 77W processors with Intel Core i7/i5/i3/Pentium/ Celeron desktop Processors, CPU TDP no higher than 77W
Chipset	Intel H61 Express Chipset
Memory	Two 240-pin DIMM support DDR3-1333/ 1066 SDRAM, (Non-ECC up to 16GB)

Video

Graphic Controller	Integrated graphics support for processors with Intel Graphics Technology
Video Memory	Shared Memory
Video Interface	<ul style="list-style-type: none"> • 2 x VGA (DB15) • 1 x LVDS

Storage

SATA	2 x SATA II ports
------	-------------------

I/O

Ethernet	2 x Gbps RJ45 with LED, Realtek RTL8111E GbE
Expansion Slot	<ul style="list-style-type: none"> • 1 x PCI-E x16 slot • 1 x Mini PCIe slot
Serial Port	<ul style="list-style-type: none"> • 1 x RS232 (DB9) • 1 x RS232/485 (Pin Header) • 8 x RS232 (Pin Header)
USB	8 x USB 2.0 (4 x Rear, 4 x Pin Header)
GPIO	8-bit Digital I/O
Paralle Port	1 x LPT DB25
PS/2	1 x Keyboard or Mouse
Audio	Realtek ALC662 Audio Codec

Hardware Feature

Hardware Monitoring	Monitoring temperature, voltage, and cooling fan status. Auto throttling control when CPU overheats.
WatchDog Timer	Software programmable 1~255 sec./mins.

Power Requirement

Power Input	1 x 20-pin ATX Power Connector 1 x 4-pin ATX 12V Power Connector
Power Consumption	TBD

Software

OS Support	Windows XP, Window 7 (32bit), Fedora 17 (32bit)
------------	---

Mechanical & Environment

Dimension	170mm x 170mm (6.69" x 6.69")
Weight	TBD
Operating Temp.	0~50°C (32~140°F)
Storage Temp.	-20~80°C (-4~176°F)
Relative Humidity	10%~90% (non-condensing)
Safety	CE, FCC compliant

Packing List

- 1 x AMB-IH61T3
- 1 x Driver CD
- 1 x Quick Guide
- 1 x IO Shield
- 2 x SATA Cable
- 1 x Cooler Module (ACC-IH61T3-H500)
- 1 x COM2 Cable
- 1 x COM3~6 Cable
- 1 x COM7~10 Cable




Ordering Information

AMB-IH61T3	Intel® H61 Mini-ITX Motherboard, 2 x VGA, 2 x GbE, 10 x COM, 8 x USB, 1 x PCI-E x16, 1 x Mini PCIe, With Cooler Module
------------	--

Accessory

ACC-IH61T3-H500	W90 x L90 x H50 mm, 3600RPM, 38dBa
-----------------	------------------------------------

Dimension

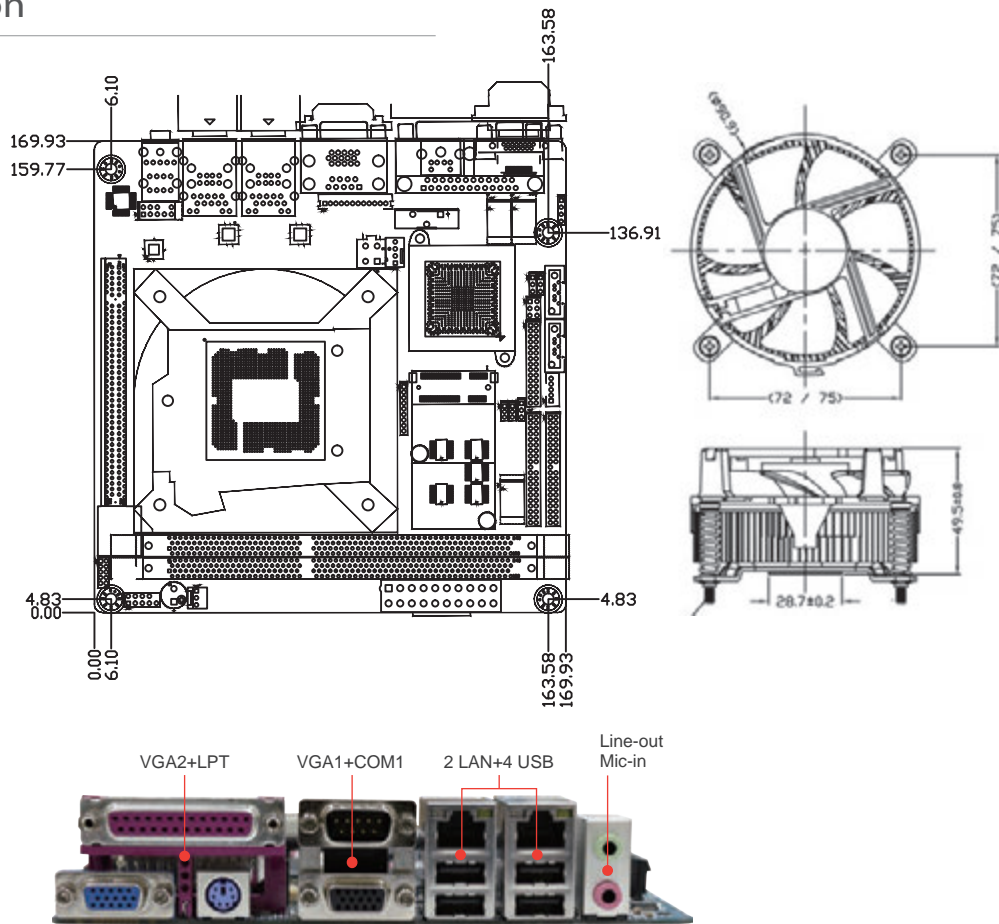

I/O Connectors

