

# Netarium-6v2

## 6U 6-Slot AdvancedTCA Reference Systems with Advantech Shelf Manager support



### Features

- 6U 6-slot 19" rackmount ATCA shelf with integrated switches and server blades
- 4 node + 2 hub slots with power distribution and cooling for up to 300W per slot
- 6 rear transition module (RTM) slots
- Supports two redundant Advantech Shelf Managers with Telco alarm signals
- 40G ATCA-compliant backplane, with dual star topology on Base and Fabric Interfaces, handles up to 10 Gbps and 3.125 Gbps per differential pair
- Redundant AC and DC power options
- Right-to-Left Push-Pull Cooling Mode
- Hot swappable FRUs (blades, RTMs, fan trays, power modules, and ShMM)
- PICMG 3.0 (AdvancedTCA Base Specification) Compliance



### Introduction

Advantech's Netarium series of ATCA reference systems are specifically targeted to help network equipment providers reach superior levels of performance over traditional rackmount servers or appliances and extend their product range at the high end. The series represents a new generation of systems which offer higher performance, greater scalability and extreme flexibility by using the latest 40 Gigabit Ethernet (40G) backplanes, switches and application blades. Advantech optimizes the systems to achieve the highest possible density at the rack level, enabling a maximum number of processor cores, network ports and switching capacity.

Each system is tailored for customers to rapidly deploy in data communication markets for applications which require faster and deeper packet processing such as policy and charging enforcement, network security, real-time traffic monitoring, load balancing, subscriber analytics and content optimization among others. As ATCA was designed to meet the carrier-grade constraints of the telecom industry, the systems integrate the chassis, cooling, power distribution and shelf management into an off-the-shelf platform solution capable of superior 5 NINES availability and reliability.

The mid-range Netarium-6v2, which supports Advantech's SMM-5060 Advanced Shelf Management Module, providing IPMI2.0 and ATCA compliant shelf management, focuses on the high performance needs of large enterprise customers in a cost effective system loaded with four MIC-5333 dual Intel® Xeon® blades and 40G switches in a dual-star configuration. The system provides up to 1.28 Tbps switching capacity and each MIC-5333 blade with RTM pair can accommodate up to 4 FMMs for over 100 Gbps egress per blade with high-speed encryption using FMM-based acceleration modules.


Many different payloads can be integrated into Advantech Netarium systems and configured to address diverse industry applications. For more details on integrating a specific configuration please contact your local sales representative.

### Specifications

Number of slots	Front blades	6 ATCA compliant node or hub blades (4 node blades and 2 hub blades)
	RTM's	6 ATCA rear transition modules
Backplane	IPMB	Bussed (radial available on request)
	Base interface	Dual star, 1000 Base-T
	Fabric interface	Dual star, up to 10Gbps and 3.125Gbps per differential pair
Cooling	Technology	Two front pluggable, hot swappable push-pull fan trays with N+1 redundant fans (no degradation with a single fan failure)
	Max. Capacity	>CPTA B.4, 300W/slot
	Air filter	One hot swappable air filter on the right side of chassis
Accessibility	Front	ATCA blades, ShMC's, front fan trays
	Rear	RTM's, PEM's / AC PSU's
Power	AC	Integrated dual, redundant AC power supplies, 2000W
	PSU cooling	Self cooled
	DC feed	2 redundant, hot swappable PEMs w. integrated EMI filters
	DC voltage	-36V to -72V (Nominal -48V)
	Current rating	40A per feed
Shelf management	Full featured	Dual, redundant enhanced shelf managers based on Advantech SMM-5060
	Interfaces	RMCP, SSH, SNMP, CLI, Web and serial interfaces
	Telco alarm	Telco alarm signals, populated on each ShMM
	Sensors	FRU presence, fan health, PSU health, temperatures, input voltages
Miscellaneous	ESD plug	Front and rear
	Cable management	Front / rear cable trays (optional)
Physical Characteristics	Dimensions (H x W x D)	6U x 19" x 462mm
	Weight	23kg (chassis weight only)

## Dimensions

Unit: mm

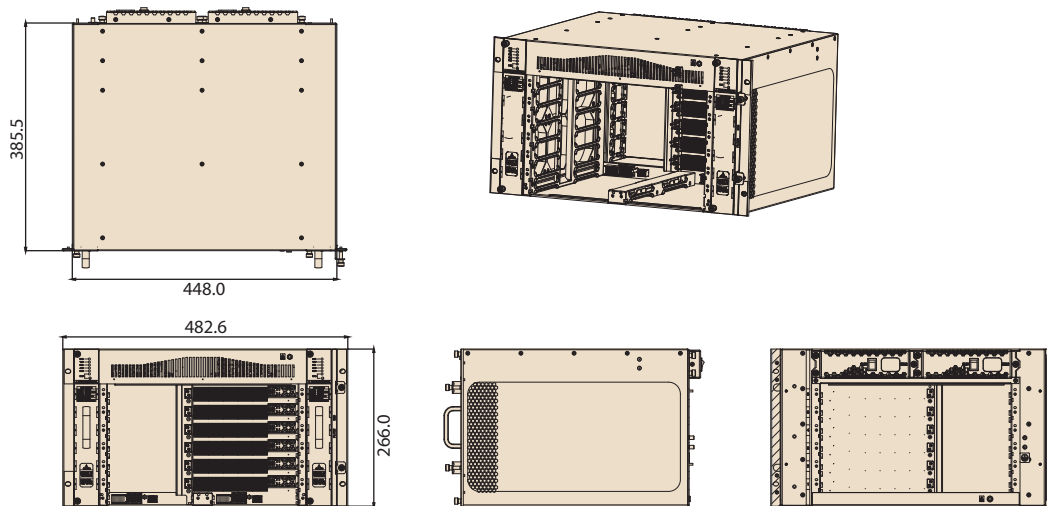

## Specifications

Environment	Temperature	Operating 0 ~ 55° C (32 ~ 131° F)	Non-operating - 40 ~ 70° C (-40 ~ 158° F)
	Humidity	5 to 93% @ 40° C (non condensing)	95% @ 40° C (non-condensing)
	Altitude	Up to 1800m (w/o cooling degradation)	Up to 4000m
Compliance	Environment	ETSI EN300019-2-1 Class 1.2, EN300019-2-2 Class 2.3, ETSI EN300019-2-3 Class 3.1E Designed to meet GR63-CORE	
	PICMG	3.0 R3.0, 3.1 R1.0, HPM.1	
	Safety & EMC	CB report (IEC60950-1), CE mark (EN60950-2001), UL60950-1/CSAC22.2 FCC47 CFR Part15, Class A, CE Mark (EN55022/EN55024/EN300386) Designed to meet GR1089-CORE	

## Ordering Information

Model Series	Configuration
Netarium-6v2 (AC)	6U, 6-slot ATCA chassis with 2x 2000W AC PSUs, 2 fan trays, air filter, dual star backplane, optional ShMM
Netarium-6v2 (DC)	6U, 6-slot ATCA chassis with 2 PEMs, 2 fan trays, air filter, dual star backplane, optional ShMM

Note: Please contact your local Advantech sales representative for more information.

## Related Products

Model Series	Description
MIC-5332	AdvancedTCA 10GbE Dual Socket CPU Blade with Intel® Xeon® E5-2600 Processors
MIC-5342	AdvancedTCA 40GbE Dual Socket CPU Blade with Intel® Xeon® E5-2600 v3/v4 Processors for Telecom Applications
MIC-5345	AdvancedTCA 40GbE Dual/Single Socket CPU Blade with Intel® Xeon® E5-2600 v3/v4 Processors for Server and NFV Applications
RTM-5104	AdvancedTCA RTM for MIC-5332
RTM-5107	AdvancedTCA Rear Transition Module for MIC-5333 and MIC-5342
ATCA-9112	40GbE AdvancedTCA Switch Blade support up to 16 slots
SMM-5060	Netarium System Management Module
Telco Systems T-HUB4	40GbE AdvancedTCA Switch Blade support up to 16 slots
Telco Systems T-ATCA510	100GbE AdvancedTCA Switch Blade



- |                                |                                |
|--------------------------------|--------------------------------|
| 1. PSU 1                       | 6. PSU 2                       |
| 2. Fan Tray 1                  | 7. Fan Tray 2                  |
| 3. MIC-5333 node board         | 8. Air Filter                  |
| 4. Switch board                | 9. SMM-5060 Shelf Management 2 |
| 5. SMM-5060 Shelf Management 1 |                                |