

06 RDS-241V

Rugged Docking Station (For RTC-1200SK/RTC-900AP)



Features

- Apply on RTC-1200SK/RTC-900AP
- Anti-theft lock with Key & VESA mount
- Downward-facing I/Os for Easy Cable Management
- Ext. GPS and WWAN with SMA Connector
- Front-facing I/O: USB x 2 in landscape Side
- Downward-facing I/Os: USB 3.0 Dual Port x 1 + RS-232 x 2, One with 5V in Pin9 & the Other with GPIO x 8, GbE x 1, M12 DC-in x 1
- Wide Voltage Range: 9VDC ~ 36VDC in M12-5P Female Connector
- Adaptor is Additionally: (Car Adaptor with Cigarette Plug or Std Adaptor for YC-14)




Specifications

System	
I/O	USB 2.0 x 2, USB 3.0 Dual Port x 1, RJ-45 jack for 10/100/1000 Base-TX Ethernet x 1, RS-232 x 2, External antenna for GPS and WWAN x 2
DC Input	M12 5P Female (DC 9V to 36V)
LED Indicator	Orange:DC in w/o Tablet,Blue:DC in w/ Tablet
Mechanical	
Color	Black
Construction	PC
Dimension (W x H x D)	10.28" x 6.50" x 2.96" (261 x 165 x 75mm)
Gross Weight	6.44 lb (2.92kg)
Environmental	
Operating Temperature	32°F ~ 104°F (0°C ~ 40°C)
Storage Temperature	14°F ~ 122°F (-10°C ~ 50°C)
ESD	Air +/- 8KV, Contact +/- 4KV
EMC/Safety	CE/FCC Class B/UL
Power Supply	
AC / DC Adapter	Input :100-240V,47-63Hz,90W Output :19V/4.74A

Dimension

Unit: mm

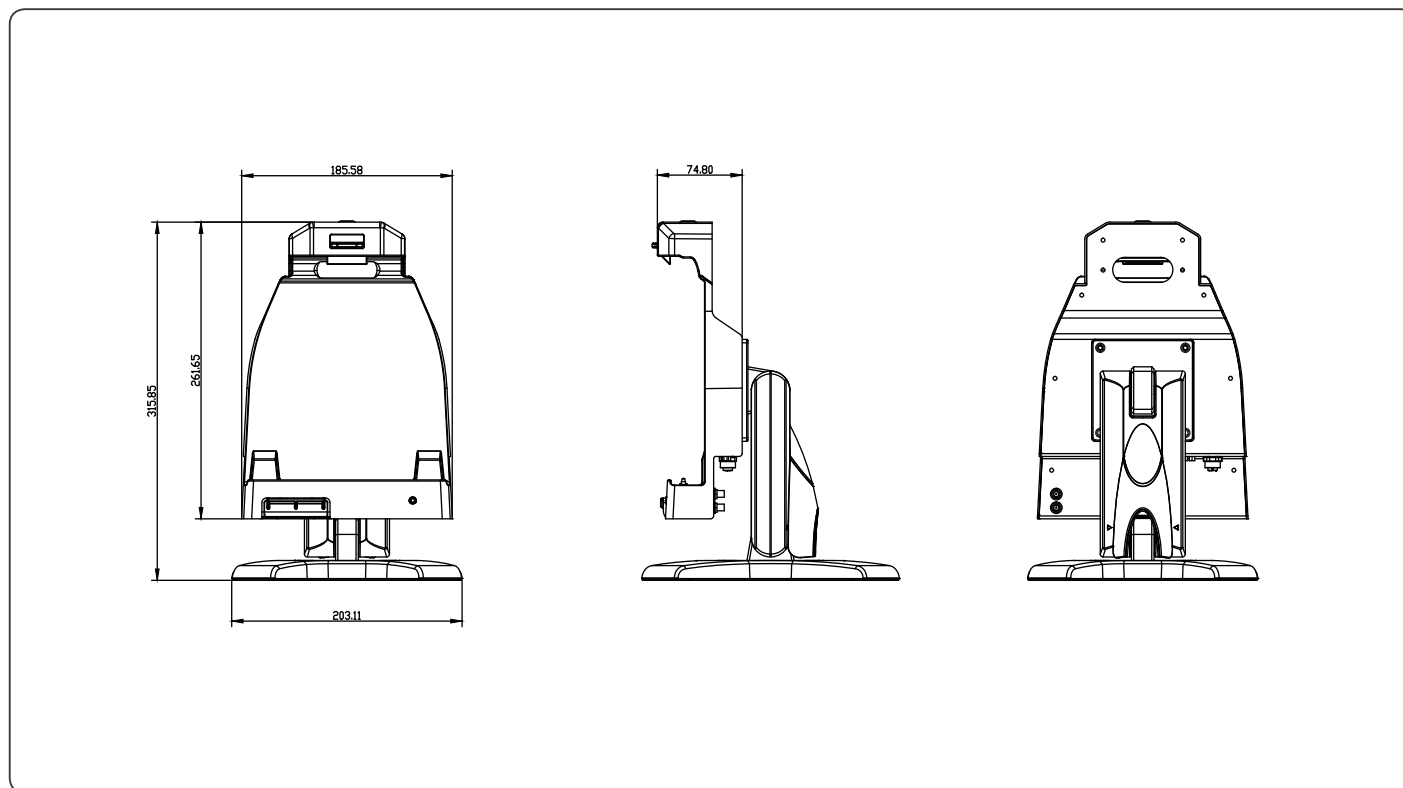

Ordering Information

Part Number	Applied Models	Stand	Expansion I/O
RDS-241V-0000	For RTC-1200 Series w/ Stand	Yes	USB 2.0 x 2, USB 3.0 Dual Port x 1, LAN x 1, RS-232 x 2, GPS and WWAN x 2
RDS-241V-0001	For RTC-1200 Series w/o Stand	No	USB 2.0 x 2, USB 3.0 Dual Port x 1, LAN x 1, RS-232 x 2, GPS and WWAN x 2

Packing List

- TBD

Optional Accessories

- TBD