


RDS-0040

4-Bay Battery Charger (For RTC-700, RTC-600A)

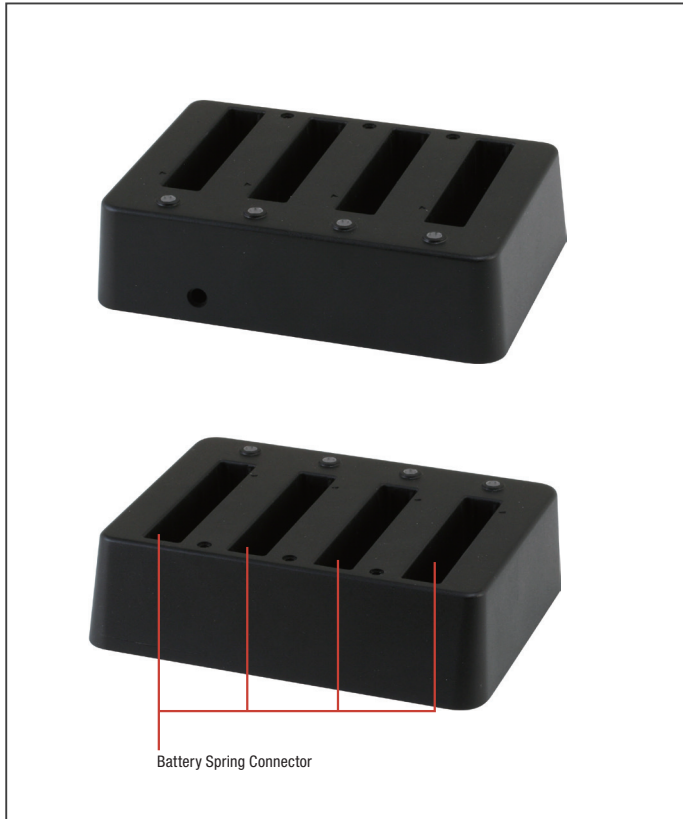

Features

- 4-Bay Battery Charger (For RTC-700, RTC-600A)



Specifications

System	
I/O	8-pin battery spring connector
DC Input	DC in 12V
LED Indicator	Green: Full, Orange:Charging
Mechanical	
Color	Black
Construction	PC
Dimensions (W x H x D)	4.09" x 5.51" x 1.46" (104mm x 140mm x 37mm)
Gross Weight	—
Environmental	
Operating Temperature	32°F ~ 104° (0°C ~ 40°C)
Storage Temperature	14°F ~ 122°F (-10°C ~ 50°C)
ESD	Air +/- 8KV, Contact +/- 4KV
EMC/ Safety	CE/FCC Class B/UL
Power Supply	
AC/DC Adapter	AC Power input: 100V-240V, 50Hz-60Hz, 36W DC Power output: 12V
DC/DC Adapter	—

Ordering Information

Part Number	Applied Models	Stand	Expansion I/O
RDS-0040-0000	For RTC-600/700x with external battery	Yes	Batteries x 4

Dimension

Unit: mm

