



Features

- Designed to accommodate any Mini-ITX board
- Supports one expansion slot
- Up to 2 2.5" or 1 3.5" SATA drive bay
- 1 optical drive bay (optional)






Panel



Dimensions

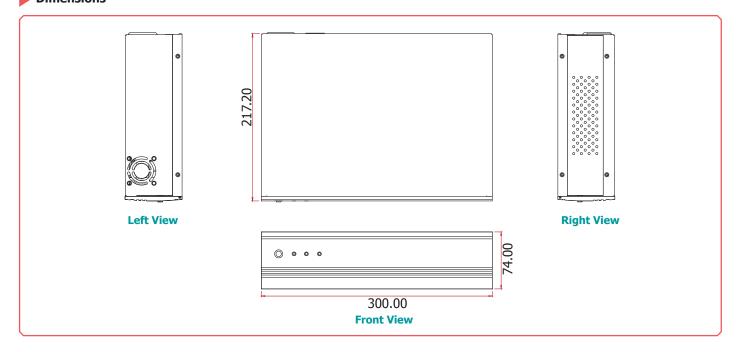

Specifications * Optional and is not supported in standard model. Please contact your sales representative for more information.

STORAGE

- Up to 2 2.5" or 1 3.5" SATA drive bay
- 1 optical drive bay*

FRONT PANEL

- 1 HDD LED
- 1 Power LED
- 1 Power button
- 1 Reset button

REAR PANEL

- 1 DB-9 cutout
- 1 DB-9/DB-15 cutout
- 1 DB-25 cutout

COOLING SYSTEM

• 1 system fan

EXPANSION

- 1 expansion slot
- 1 PCIe x16 or 1 PCI slot

POWER

- Power type
- Flex ATX power supply

ENVIRONMENT

- Temperature
- Storage: -20°C ~ 60°C
- Humidity
- 90% RH at 45°C, 1 week

VIBRATION

- Operating: 1G, 5~500Hz
- Non-operating: 1.5G, 5~25Hz
- IEC 68-2-64 compliant

SHOCK

- Operating: 3G peak acceleration (11 msec. duration)
- Non-operating: 10G peak acceleration (11 msec. duration)
- IEC 68-2-27 compliant

CONSTRUCTION

- Front panel: aluminum
- Rear chassis: sheet metal

MOUNTING

- 2 types of wall mount bracket
- Type A




- Type B



- Brackets and screws*


DIMENSIONS

• 300mm x 74mm x 217.20mm (W x H x D)

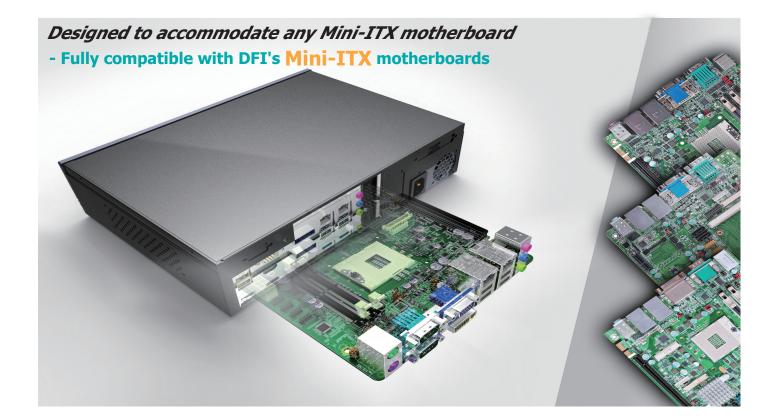




▶ Wall Mounting

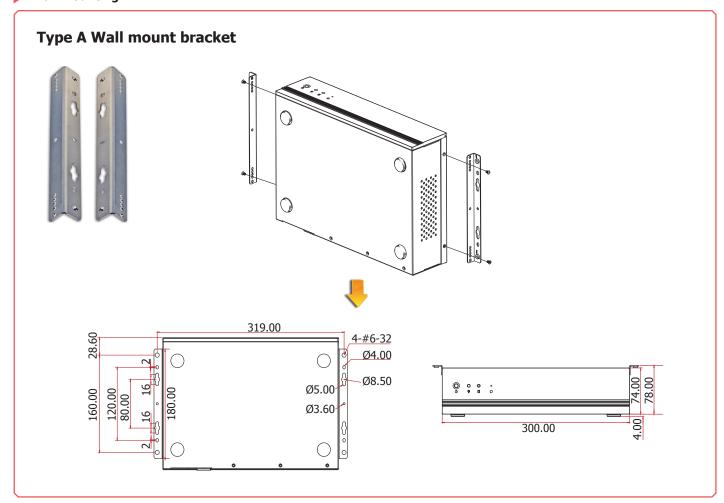



Wall Mounting

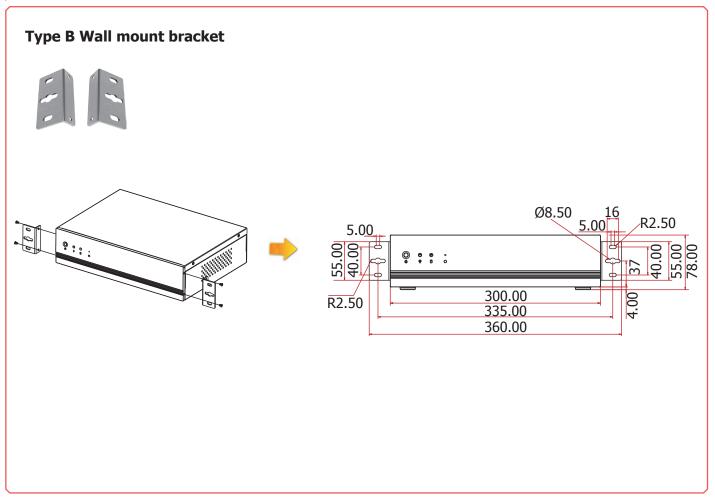

Optional Items

Optional Items	Part Number	Description
Wall Mount	761-DT1220-100G	DT122 type A wall mount kit for top cover, RoHS
	761-DT1220-000G	DT122 type B wall mount kit for front cover, RoHS