

Datasheet

# SATA Slim

## 3SE series

- SATA III solution for industrial field
- iSMART disk health monitoring
- Intelligent error recovery system
- Excellent data transfer speed
- Zero mechanical interference
- Compatible with JEDEC MO-297 standard



### Introduction

Innodisk SATA Slim 3SE is SATA III 6Gb/s Flash based disk, which designed with standard SATA interface (7+15 SATA connector), and compatible with JEDEC MO-297 standard. With its smaller dimension, SATA Slim 3SE is an alternative solution of 2.5" SSD for those embedded system that may have mechanical and space concerns. Innodisk SATA Slim 3SE operates under SATA III (6.0Gb/s) interface with excellent performance and reliability making it the ideal solution for a variety of applications, including embedded system, and industrial field.


# SATA Slim

## 3SE series

### Drawing

Contact us for more information about the SATA Slim 3SE

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

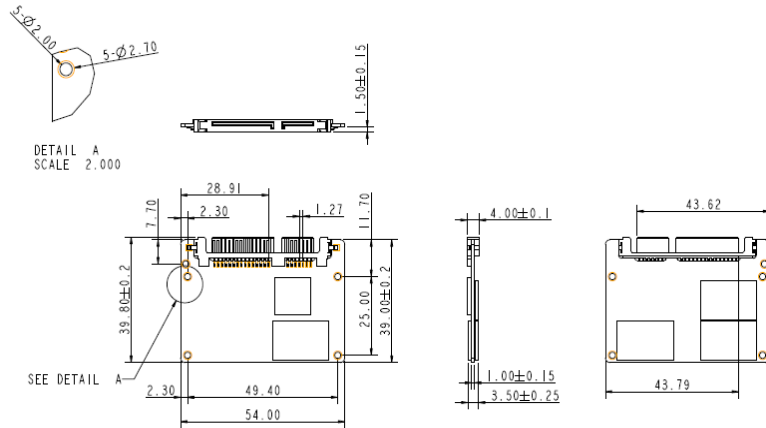

## Specifications

Interface	SATA III
Flash Type	SLC
Capacity	4GB~128GB
Max. Channels	4
Sequential R/W (MB/sec, max.)	470 / 370
Max. Power Consumption	1.1W (5V x 220 mA )
Thermal Sensor	ST- Optional/WT- Default
External DRAM Buffer	-
H/W Write Protect	-
Pin7 Power	-
ATA Security	√
S.M.A.R.T.	√
Dimension (WxLxH)	54.0 X 39.0 X 4.0 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

#### Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,  
Xizhi Dist., New Taipei City,  
Taiwan (R.O.C.)  
Tel: +886-2-77033000  
Email: sales@innodisk.com

#### Branch Offices:

USA  
[usasales@innodisk.com](mailto:usasales@innodisk.com)  
+1-510-770-9421  
Europe  
[eusales@innodisk.com](mailto:eusales@innodisk.com)  
+31-040-282-1818  
Japan  
[jpsales@innodisk.com](mailto:jpsales@innodisk.com)  
+81-45-594-7581  
China  
[sales\\_cn@innodisk.com](mailto:sales_cn@innodisk.com)  
+86-755-21673689  
[www.innodisk.com](http://www.innodisk.com)

© 2014 Innodisk Corporation.  
All right reserved. Specifications  
are subject to change without  
prior notice.

## Ordering Information

20150113

Operation Temp.	4GB	8GB	16GB	32GB	64GB	128GB
Standard Grade (0°C ~ +70°C)	DESLM-04GD06SCBDB	DESLM-08GD06SCBQB	DESLM-16GD06SCBQB	DESLM-32GD06SCBQB	DESLM-64GD06SCBQB	DESLM-A28D06SCBQB
Industrial Grade (-40°C ~ +85°C)	DESLM-04GD06SWBDB	DESLM-08GD06SWBQB	DESLM-16GD06SWBQB	DGSLM-32GD06SWBQB	DESLM-64GD06SWBQB	DESLM-A28D06SWBQB

**innodisk**

[www.innodisk.com](http://www.innodisk.com)